



Catalogue
FOOD SERVICE
Chapter
REFRIGERATION

Model
ATM-101 ECO 230V 1N 60Hz

19048757


27/09/2019

BLAST CHILLER ATM-101 ECO

- Satin finish stainless steel outside except for back panel (plastic covered).
- AISI-304 18/10 stainless steel inside.
- Fully injected compact structure.
- AISI-304 18/10 stainless steel tray slides included.
- Hermetically sealed compressor with ventilated condenser.
- ECO type, user friendly control panel.
- Thermostat control cycles with end of cycle acoustic alarm.
- The cycles can be controlled by time or by temperature according to the reading of the temperature sensor inside the product (time control is automatically applied when no probe is used).
- When the refrigerating cycle is over, the equipment works as a refrigerated cabinet, and the temperature remains between +2 and +4 °C, or as a freezer, with temperatures under -18 °C.
- Fitted with non-heated temperature probe.
- Automatic defrosting device activated by the user. Water evaporation device without power consumption.
- 60 mm injected polyurethane insulation. 40 kg/m3 density. CFC free.
- 10 Levels for GN-1/1 trays.
- 10 Levels for 60x40 trays.
- Production per refrigeration cycle = 50 kg
- "- Production per freezing cycle = 30 kg
- "

DIMENSIONS

X Width	790 mm	X Gross width	895 mm
Y Depth	800 mm	Y Gross depth	810 mm
Z Height	1420 mm	Z Gross height	1640 mm
Net Weight	153,0 kg	Gross Weight	160,0 kg
Net volume	0,897 m3	Gross volume	1,189 m3



ELECTRICITY TECHNICAL SPECIFICATIONS

Electric power	2,000 kW
Voltage	230V - 1N
Amperage	9,1A
Electric frequency	60Hz

GAS TECHNICAL SPECIFICATIONS

Gas type	R-404A
----------	--------

COLD TECHNICAL SPECIFICATIONS

Refrigeration power	1,300 kW
Climate class	5
Cooling gas load	1100,000 g

CONNECTIONS TECHNICAL SPECIFICATIONS

Single-phase 230V wiring	2X2,5+T - 12 A
Three-phase +N 400V wiring	4X1,5 +T - 12 A



Catalogue
FOOD SERVICE


Chapter
REFRIGERATION

Model
ATM-101 ECO 230V 1N 60Hz

19048757

27/09/2019

MODELO / MODEL		101 ECO FAG.
Dimensiones Exteriores External Dimensions	mm	790x800x1420
Dimensiones Interiores Internal Dimensions	mm	670x410x775
Tipo Abatidor Type Blast Chiller		Mixto
Capacidad Capacity	n°	10 GN1/1 / 10 EN
Separacion entre bandejas Interstep trays	mm	65
Espesor aislamiento Thickness	mm	60
Medidas hueco puerta door opening measures	mm	670x760
Refrigerante Refrigerant	Gas	R404A
Ciclo refrigeración Chilling cycle	90' °C	+90/+3
Ciclo Congelación Freezing cycle	240' °C	+90/-18
Capacidad Abatimiento (EN17032) Chilling capacity	120' Kg	50
Capacidad Congelación (EN17032) Freezing capacity	270' Kg	30
Grupo frigorífico Refrigeration Unit	°C	Incorporado
Alimentación eléctrica Electric Power supply	V/~-/Hz	230/1/50
Intensidad Máxima Max. Absorbed current	A	8.9
Potencia Frigorífica Capacity refrigeration	W	1250
Potencia eléctrica Input electric Power	W	1900
Forma entrada bandeja Input tray	mm	530
Volumen bruto exterior Total Volume external	m ³	1,34
Volumen interior neto Net Volume internal	m ³	0,21
Peso Weigh	Kg	155

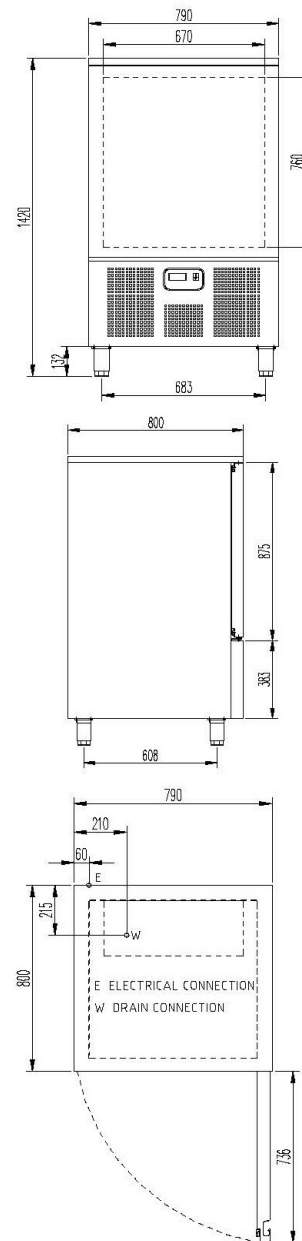

Capacidad según EN17032 (Refr. +65 °C a +10 °C en 120'; Cong +65 °C a -18 °C en 270')