



**Catalogue**  
**FOOD SERVICE**  
**Chapter**  
**REFRIGERATION**

**Model**  
 ATA-061 230V 1N 60Hz

19030606

27/09/2019


**BLAST CHILLER ATA-061**

- Mixed models, for chiller blasting (+2 °C) or freezing cycles (-18 °C).
- There two working options both for chiller blasting and freezing:
  - Power cycle: for over 2 cm thick compact products.
  - Soft cycle: for less than 2 cm thick or low density products. The cycle is run in two programmed stages. The soft cycle prevents frost on the product.
- Cycle duration:
  - Refrigerating cycle: 90 minutes.
  - Freezing cycle: 240 minutes.
- Control panel with touch screen.
- Electronic programming of the cycles and core probe.
- The cycles can be controlled by time or by temperature according to the reading of the temperature sensor inside the product (time control is automatically applied when no probe is used).
- When the refrigerating cycle is over, the equipment works as a refrigerated cabinet, and the temperature remains between +2 and +4 °C, or as a freezer, with temperatures under -18 °C.
- Hermetically sealed compressor with ventilated condenser.
- Copper piping and aluminium flaps evaporator.
- Forced draught cooling system.
- Inner tray slides included.
- Automatic defrosting device activated by the user. Water evaporation device without power consumption.
- 60 mm injected polyurethane insulation. 40 kg/m<sup>3</sup> density. CFC free.
- 6 Levels for GN-1/1 trays.
- 6 Levels for 60x40 trays.
- Production per refrigeration cycle = 27 kg
- Production per freezing cycle = 21 kg

**Ordering options:**

- Heated probe.
- USB connection for data extraction.
- "
- "

**DIMENSIONS**



X Width	900 mm	X Gross width	974 mm
Y Depth	935 mm	Y Gross depth	995 mm
Z Height	1105 mm	Z Gross height	1334 mm
Net Weight	120,0 kg	Gross Weight	125,0 kg
Net volume	0,930 m <sup>3</sup>	Gross volume	1,293 m <sup>3</sup>

**ELECTRICITY TECHNICAL SPECIFICATIONS**

Electric power	1,600 kW
Voltage	230V - 1N
Amperage	8,9A
Electric frequency	60Hz

**GAS TECHNICAL SPECIFICATIONS**

Gas type	R-404A
----------	--------

**COLD TECHNICAL SPECIFICATIONS**

Refrigeration power	0,990 kW
Climate class	5
Cooling gas load	1000,000 g

**CONNECTIONS TECHNICAL SPECIFICATIONS**

Single-phase 230V wiring	2X1,5+T - 10 A
Drain 1 diameter	38






Catalogue  
**FOOD SERVICE**

Chapter  
**REFRIGERATION**

Model  
**ATA-061 230V 1N 60Hz**

19030606

27/09/2019

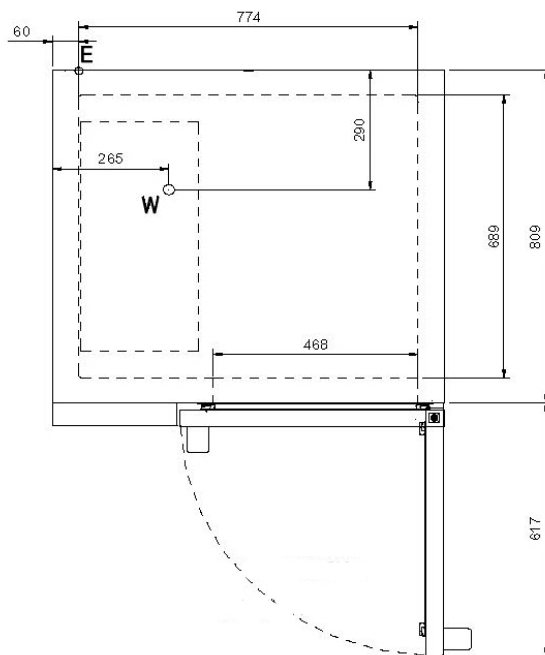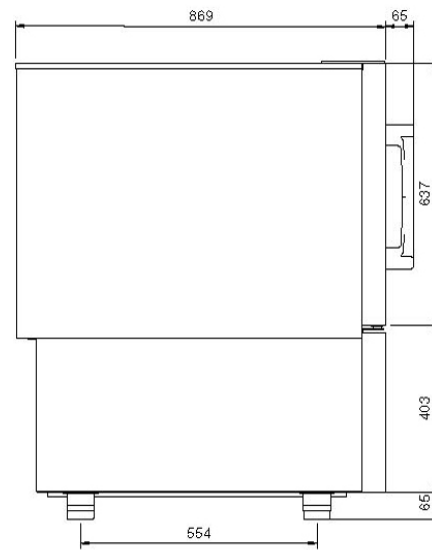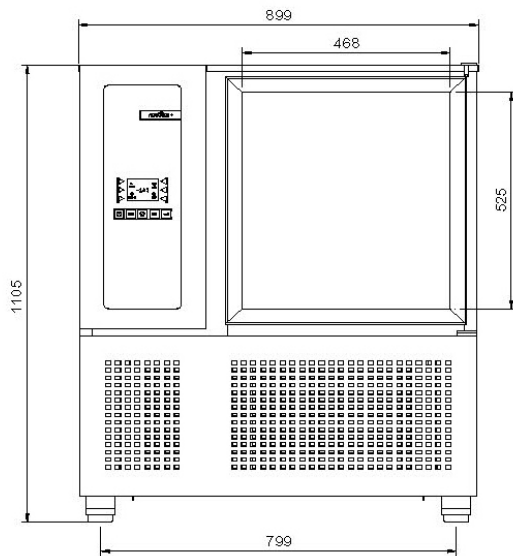

E : Toma eléctrica  
Electrical connection

W: Toma de agua  
Water inlet