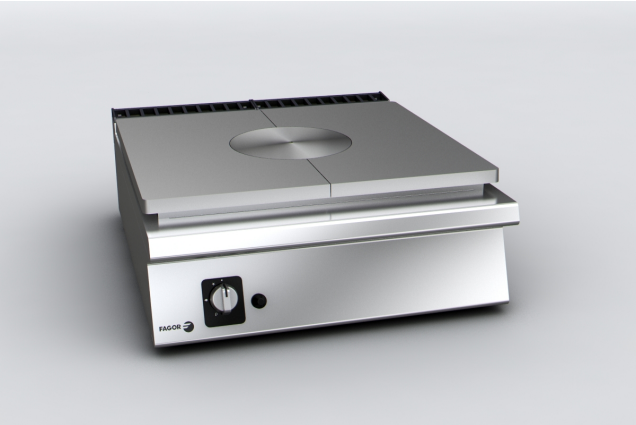

Catalogue
FOOD SERVICE
Chapter
COOKING

Model
C-G910 NG

19075518 28/02/2020

SOLID TOP COOKER, C-G910

- Deep-drawn cooktop manufactured in 2 mm thick AISI-304 stainless steel.
- Laser-cut joints, automatic welding and polishing. Hidden screws.
- 10 mm thick cast iron plate with rounded corners. Oven floor with 300 mm diameter.
- Refractory brick with cast iron shield inside for improved heat use and distribution.
- Differentiated usage temperatures: 500 °C at the centre and 200 °C at the edges.
- Low-consumption pilot light and thermocouple located within the body of the burner for greater protection.
- Flexible stainless steel gas pipes, facilitating internal manipulation in order to make repairs easier.
- Controls with a protective support base and system to prevent water infiltration.
- High-temperature enamelled cast iron flue protector which is flush with the plate therefore improving manoeuvrability, supporting larger containers and increasing the usable surface area.
- Access to components from the front.
- Machine with a 11 kW burner underneath the plate.

OPTIONAL ACCESSORIES
- Water column.
"
"

DIMENSIONS



X Width	800	mm	X Gross width	840	mm
Y Depth	930	mm	Y Gross depth	1022	mm
Z Height	290	mm	Z Gross height	535	mm
Net Weight	143,0	kg	Gross Weight	155,0	kg
Net volume	0,222	m3	Gross volume	0,459	m3

ELECTRICITY TECHNICAL SPECIFICATIONS

Voltage	N/A
Electric frequency	N/A

GAS TECHNICAL SPECIFICATIONS

Gas type	NG
Gas power	11,50 kW
Gas consumption	1,150 m3/h
Regulated	NG G20/G25/G25.1 20/25/25 mbar

CONNECTIONS TECHNICAL SPECIFICATIONS

Gas diameter 1	'R.3/4"G'

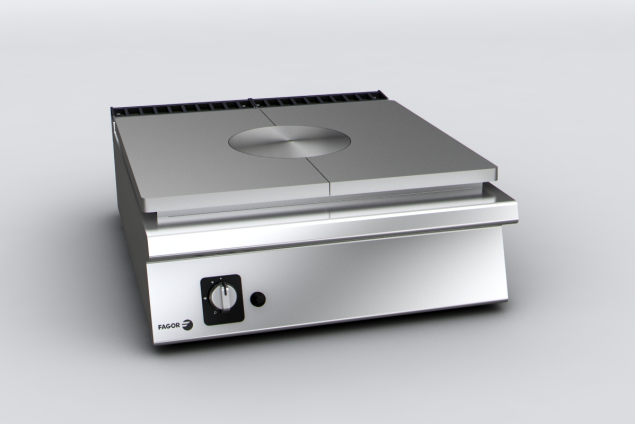

Catalogue
FOOD SERVICE

Chapter
COOKING

Model
C-G910 NG

19075518 28/02/2020

C-G910

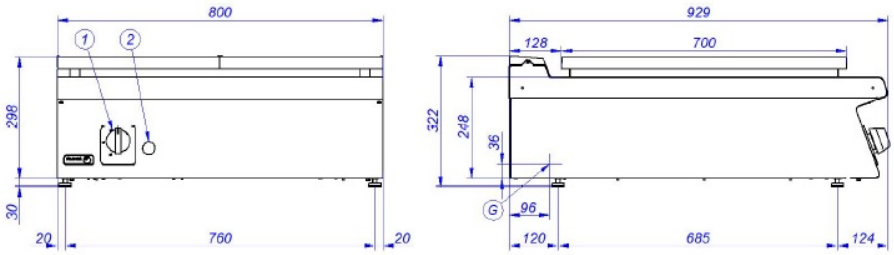

C-G911

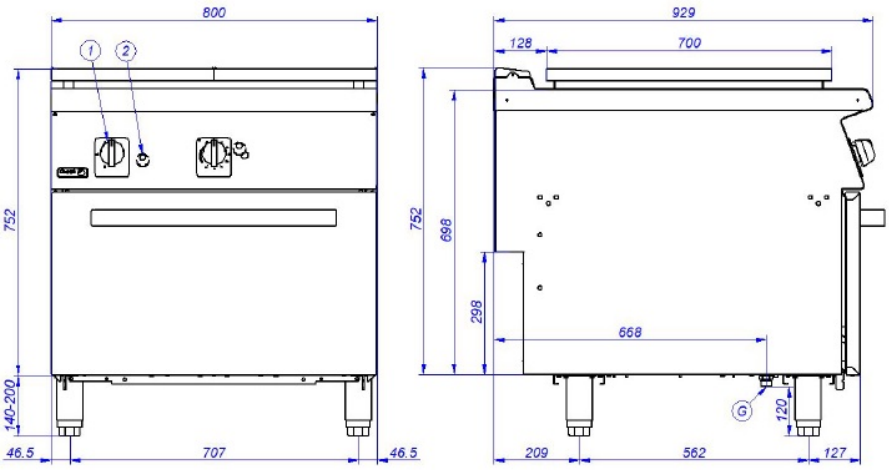

G. Entrada de Gas	Gas Inlet
1. Válvula de gas	Gas valve
2. Pulsador tren de chispas	Piezoelectric ignitor
3. Mando H	H control