



Catalogue
FOOD SERVICE
Chapter
COOKING

Model
C-G960 NG

19075544

28/02/2020


GAS COOKER, C-G960

- Deep-drawn cooktop manufactured in 2 mm thick AISI-304 stainless steel.
- Laser-cut joints, automatic welding and polishing. Hidden screws.
- 397 x 350 mm grates enabling the use of large pots and pans. The reduced distance of 75 mm between the central bars makes it possible to use pots with a very small diameter (8 cm), avoiding the risk of smaller pans tipping over.
- The grates are made of RAAF enamelled cast iron (resistant to alkaline and acid products, fire and high temperatures).
- Double-crown burners and diffusers made of nickel-plated cast iron which guarantee an even distribution of heat from the flame to the base of the pans, even in large pans. This therefore prevents heat from building up in a specific point and optimises energy transfer to the product.
- Burners are easy to position.
- Low-consumption pilot light and thermocouple located within the body of the burner for greater protection.
- Flexible stainless steel gas pipes, facilitating internal manipulation in order to make repairs easier.
- Controls with a protective support base and system to prevent water infiltration.
- High-temperature enamelled cast iron flue protector which is flush with the grates therefore improving manoeuvrability, supporting larger containers and increasing the usable surface area.
- Access to components from the front.
- Machine with six burners of different strengths in the cooktop to adapt to containers and their use with different foods: 3 x 5.25 (Ø 100 mm) + 2 x 8.0 (Ø 120 mm) + 10.2 kW (Ø 140 mm).

OPTIONAL ACCESSORIES

- Frying plate to place on 5.25 kW burners.
- Water column.
- "
- "

DIMENSIONS



X Width	1200 mm	X Gross width	1022 mm
Y Depth	930 mm	Y Gross depth	1240 mm
Z Height	290 mm	Z Gross height	535 mm
Net Weight	123,0 kg	Gross Weight	148,0 kg
Net volume	0,333 m3	Gross volume	0,678 m3

ELECTRICITY TECHNICAL SPECIFICATIONS

Voltage	N/A
Electric frequency	N/A

GAS TECHNICAL SPECIFICATIONS


Gas type	NG
Gas power	41,95 kW
Gas consumption	4,370 m3/h
Regulated	NG G20/G25/G25.1 20/25/25 mbar

CONNECTIONS TECHNICAL SPECIFICATIONS


Gas diameter 1	'R.3/4"'
----------------	----------




C-G920 & C-G920 H

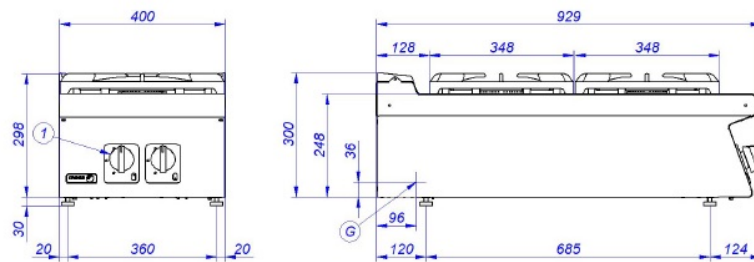

C-G940 & C-G940 H

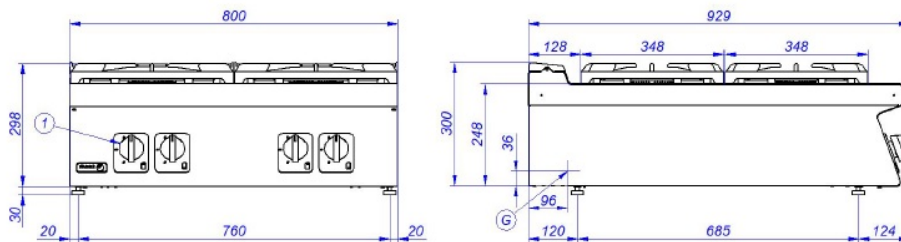

C-G960 & C-G960 H

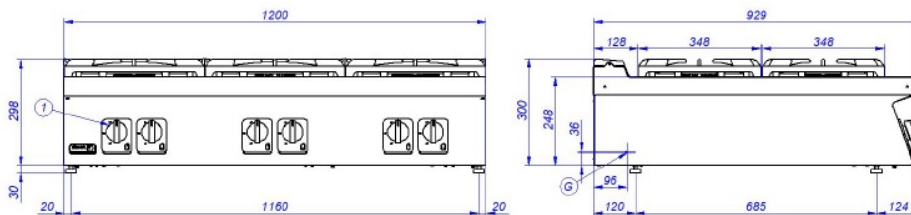

- G. Entrada de Gas
- 1. Válvula de gas
- 2. Pulsador tren de chispas
- 3. Mando H

- Gas Inlet
- Gas valve
- Piezoelectric ignitor
- H control