



Catalogue
FOOD SERVICE
Chapter
DISHWASHING

Model
LP-130 B DD HRS

19076877

26/03/2020


UTENSIL WASHER, LP-130 B DD HRS

- For the cleaning of utensils and kitchen recipients.
- Made with double skinned of stainless steel 18/10 (AISI-304).I to reduce noise and thermal dispersion.
- Built-in tank. Double stainless steel filter.
- Electronic control panel.
- Wash temperature 55°C and rinse 80°C.
- Wash cycles: 2' - 4' - 6'.
- Thermostop system for an optimal rinsing temperature.
- Stainless steel rotating wash arms which constantly change direction and have several impact angles, guaranteeing an intense wash.
- Self-cleaning vertical washing pumps.
- DD: Detergent dispensers and brightener included.
- Thanks to the drain pump, the self-cleaning cycle is automatic.
- Rinsing pump that guarantees a perfect hygienic result and constant pressure control during the rinse.
- Continuous wash cycle up to 12'.
- B: Drain pump included.
- HRS: Model with Heat Recovery System.

- Basket dimensions: 1320x700 mm
- Useful height of 850 mm
- Tank capacity: 131 L
- "- Water use per cycle: 6 L
- "

DIMENSIONS

X Width	1470 mm	X Gross width	1750 mm
Y Depth	850 mm	Y Gross depth	1100 mm
Z Height	2160 mm	Z Gross height	2200 mm
Net Weight	301,0 kg	Gross Weight	317,0 kg
Net volume	2,366 m3	Gross volume	4,235 m3



ELECTRICITY TECHNICAL SPECIFICATIONS

Engine power	5,40 kW
Electric power	15,900 kW
Amperage (A)	32A
Heating power	10,50 kW
Voltage	400V - 3N
Electric frequency	50Hz

CONNECTIONS TECHNICAL SPECIFICATIONS

Water inlet diameter	3/4"
----------------------	------






Catalogue
FOOD SERVICE
Chapter
DISHWASHING

Model
LP-130 B DD HRS

19076877

26/03/2020

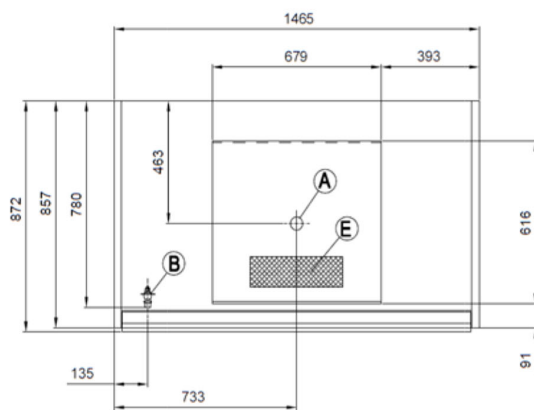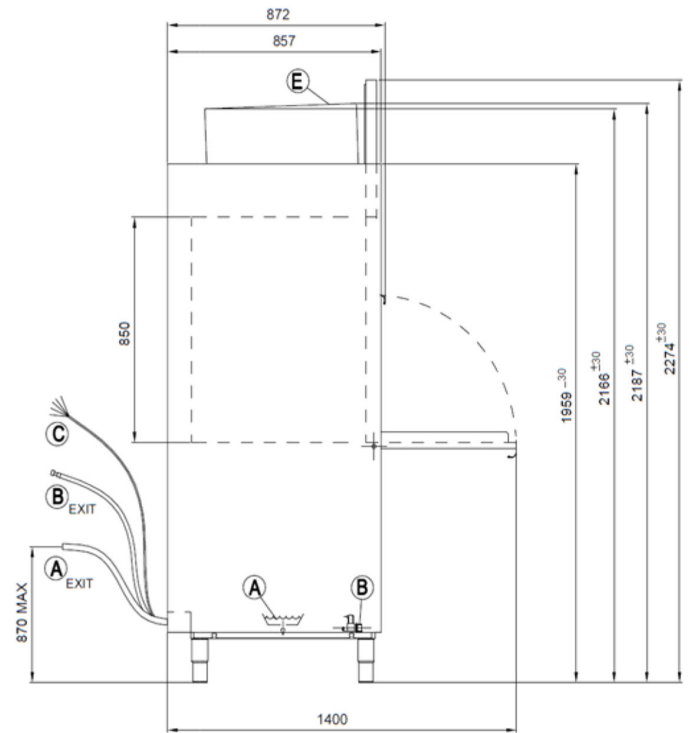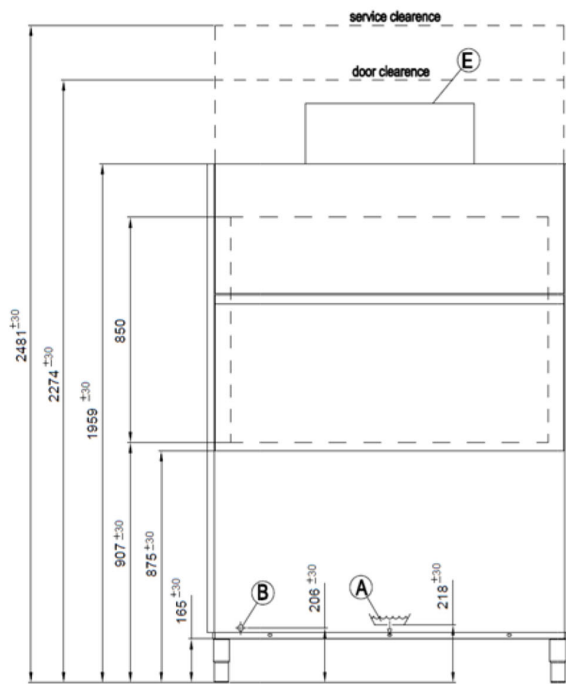

A	50mm M	A EXIT	32 mm M
B	G 3/4" M	B EXIT	G 3/4" F
C	Power supply	E	Steam exhaust

