Catalogue
FOOD SERVICE
Chapter
COOKING

Model
C-E910 400V 3N

19075495 28/02/2020

SOLID TOP ELECTRIC COOKER, C-E910
- Pressed cooktops manufactured in 2 mm thick AISI-304 stainless steel, with rounded edges, designed
to prevent spilled liquid from pans from entering the interior of the oven.
- Laser-cut joints, automatic welding and polishing. Hidden screws.
- Four elements underneath the 15 mm-thick, 720 x 720 mm steel plate, distributed so that they independently heat the four quarters of the plate.
- Power control for each element. This makes it possible to work with different temperature gradients on the plate.
- Power regulation via selector with 7 positions.
- Internal fan to reduce the temperature of the components.
- Deep-drawn cooktop with rounded corners for easy cleaning.
- High-temperature enamelled cast iron flue protector.
- Access to components from the front.- Machine with IPX5 grade water protection.
"
"

DIMENSIONS



X Width	800 mm	X Gross width	840 mm
Y Depth	930 mm	Y Gross depth	1022 mm
Z Height	290 mm	Z Gross height	535 mm
Net Weight	85,0 kg	Gross Weight	101,0 kg
Net volume	0,216 m3	Gross volume	0,459 m3

ELECTRICITY TECHNICAL SPECIFICATIONS

Electric power	16,000 kW
Amperage (A)	32A
Heating power	16,00 kW
Voltage	400V - 3N
Electric frequency	50/60Hz

CONNECTIONS TECHNICAL SPECIFICATIONS

Three-phase +N 400V wiring	4X4MM2+T

Catalogue
FOOD SERVICE

Chapter
COOKING

Model
C-E910 400V 3N

19075495 28/02/2020

C-E910

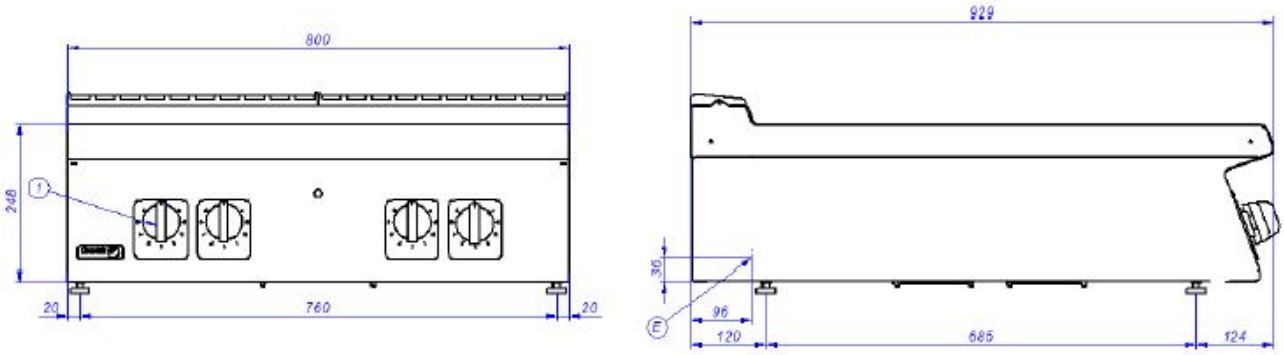

C-E911

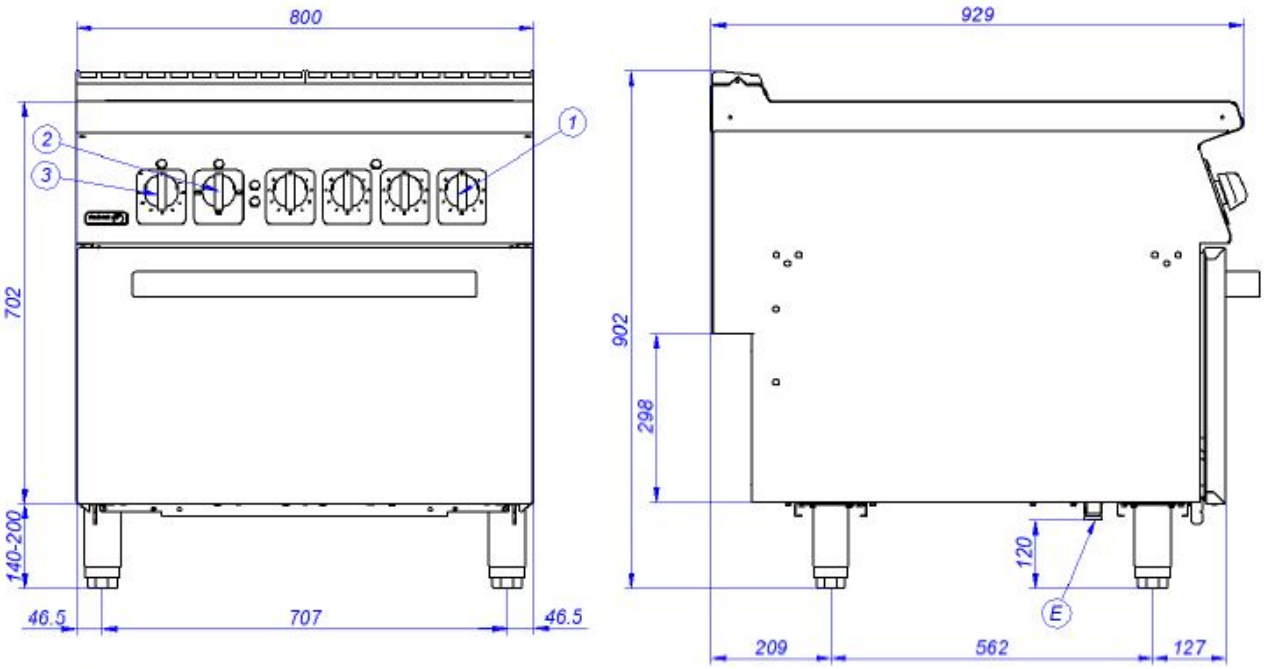

E. Conexión eléctrica — Electrical connection
1. Mando placas M — M plates control
2. Mando horno 1 — Oven control 1
3. Mando horno 2 — Oven control 2