



Catalogue
FOOD SERVICE
Chapter
COOKING

Model
C-E940 400V 3N

19075505

28/02/2020

ELECTRIC COOKER, C-E940


- Pressed cooktops manufactured in 2 mm thick AISI-304 stainless steel, with rounded edges, designed to prevent spilled liquid from pans from entering the interior of the oven.
- Laser-cut joints, automatic welding and polishing. Hidden screws.
- Power regulation via selector with 7 positions.
- Safety thermostat for each plate.
- Internal fan to reduce the temperature of the components.
- Deep-drawn cooktop with rounded corners for easy cleaning.
- High-temperature enamelled cast iron flue protector.
- Access to components from the front.
- Machine with IPX5 grade water protection.

- Four cast iron heating plates, 300 x 300 mm, with 4 kW power, hermetically sealed to the deep-drawn cooktop.

"
"

DIMENSIONS

X Width	800 mm	X Gross width	840 mm
Y Depth	930 mm	Y Gross depth	1022 mm
Z Height	290 mm	Z Gross height	535 mm
Net Weight	85,0 kg	Gross Weight	101,0 kg
Net volume	0,222 m3	Gross volume	0,459 m3



ELECTRICITY TECHNICAL SPECIFICATIONS

Electric power	16,000 kW
Amperage (A)	32A
Heating power	16,00 kW
Voltage	400V - 3N
Electric frequency	50/60Hz

CONNECTIONS TECHNICAL SPECIFICATIONS

Three-phase +N 400V wiring	4X4MM2+T
----------------------------	----------

Catalogue
FOOD SERVICE


Chapter
COOKING

Model
C-E940 400V 3N


19075505

28/02/2020


C-E920

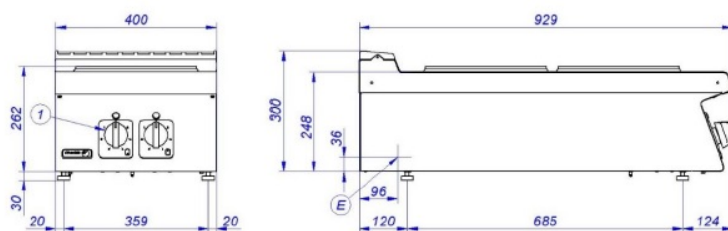

C-E940

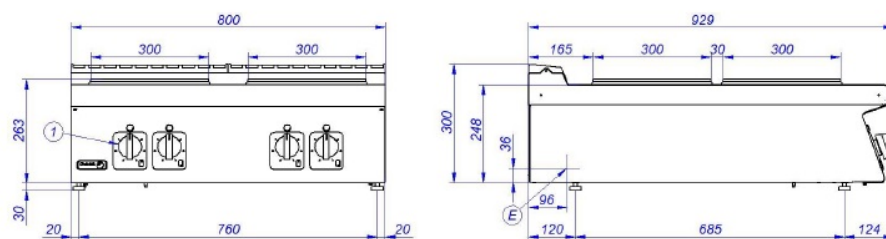

C-E960

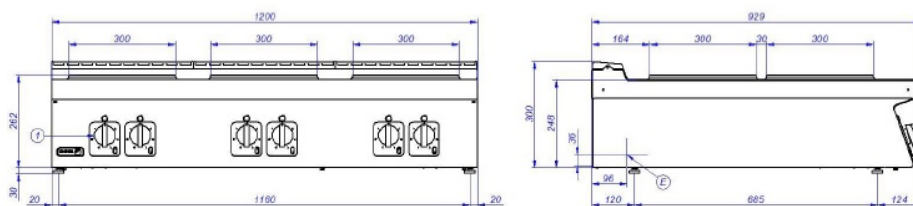

E. Conexión eléctrica
1. Mando placas M
2. Mando horno 1
3. Mando horno 2

Electrical connection
M plates control
Oven control 1
Oven control 2